


GBP940

GBP940-220*

HYDRAULIC POWERUNIT

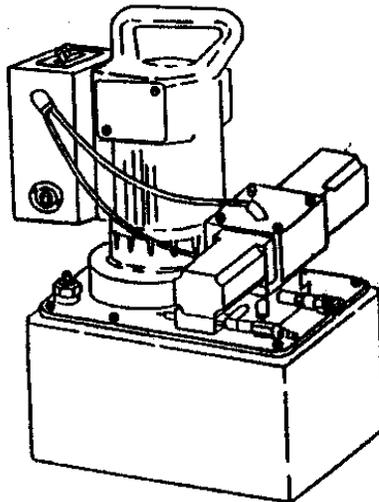

The GBP940 Hydraulic Powerunit is a light-weight, portable power source designed to operate on a wide range of hydraulic installation tools. The unit is electrically powered and delivers up to 10,000 psi working pressure with simple adjustable hydraulic outputs. The 24 volt remote control circuit, in the installation equipment, controls the pump output directional valve. The GBP940 Hydraulic Powerunit is available in 115 volt or 230* volt, single phase, alternating current. Out put pressures as shipped are: PULL 5400-5700 psi, RETURN 2200-2400 psi.

The GBP940 Hydraulic Powerunit is available separately or in kits including hydraulic quick-disconnect couplers, electrical connectors and hose cord kits in various lengths.

GBP940-12 includes the GBP940 Powerunit and 12 ft. Hose Kit, part #940701.

GBP940-26 includes the GBP940 Powerunit and 26 ft. Hose Kit, part #940705.

GBP940-38 includes the GBP940 Powerunit and 38 ft. Hose Kit, part #940709.

GBP940-52 includes the GBP940 Powerunit and 52 ft. Hose Kit, part #940714.

GAGE BILT

GAGE BILT PRODUCTS CORP.

14500 Barber Drive
Warren, Mi 48088

(586) 771-7664

(586) 771-2665 Fax

e-mail: solutions@gagebilt.com / www.gagebilt.com

Width.....10.5 inches.....267mm
 Length.....12.5 inches.....318mm
 Height.....18.1 inches.....460mm
 Weight (without hyd. fluid).....66 pounds.....30kg
 Electrical System.....115 volts, 50/60 hertz, single phase, AC
 230 volts, 50/60 hertz, single phase, AC
 Remote Control.....Solenoid operated Directional Valve, 24 volts
 Motor.....12,000 RPM, 1-1/8 HP, 20 amps nom.
 PUMP.....2 - stage, Gear-Piston Type, 70 cu.in./min. @ 5000 psi
 Output Pressure.....Adjustable to 10,000 psi

(Shipped with PULL pressure at 5400-5700 psi (37350-39300 kPa)
 and the RETURN pressure at 2200-2400 psi (15200-16500 kPa).

Reservoir Capacity.....1-1/2 gal.....006m

Operating Temperature (Ambient-min.) 0 F.....-18 C

(Hydraulic Fluid-max.) 250 F.....65 C

Installation tools powered by the GBP940 Powerunit are:

GBP204	GBP7500A	2600	7042
GBP205	209	4802	7142
GBP206-375	506	4803	7304
GBP208-625	507	5304	8042
GBP585	586	5901	8304
GBP2400	2480	6042	9304
GBP4801	2580	6304	12142

Collar Cutters powered by the GBP940 Powerunit are:

516 520 524 532 536

WARRANTY
<p>Seller warrants that all goods covered by this catalog will conform to applicable specifications and will replace, or repair, F.O.B. our plant, any goods providing defective from faulty workmanship, or material, for 90 days from date of shipment.</p> <p>Said warranty to remain in effect if and only if such goods are used in accordance with all instructions as to maintenance, operation, and use set forth in manuals and instruction sheets furnished by seller.</p> <p>Sellers obligation under this warranty shall be limited to the repair or rework of the goods supplied or replacement thereof, at Seller's option, and in no case is to exceed the invoice value of said goods. Under no circumstances will seller be liable for incidental or consequential damages or for damages incurred by the buyer or subsequent user in repairing or replacing defective goods or if the goods covered by this warranty are reworked or subjected to any type of additional processing.</p> <p>This warranty is void if Seller is not notified in writing of any rejections or defects within 90 days after the receipt of the material by the customer.</p> <p>THIS WARRANTY IS MADE IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY.</p>